

Motorola's AltiVec™ Technology

Sam Fuller

System Architecture & Product Planning Manager,
Networking & Computing Core Technologies

Motorola Inc.
Semiconductor Product Sector
6501 William Cannon Drive West, Austin, Texas 78735

Introduction

Over the last 25 years, microprocessors have enjoyed a continuous increase in performance and attendant reduction in price/performance. Current best of breed microprocessors operate at frequencies in excess of 300 MHz and offer super-scalar instruction dispatch, sophisticated branch prediction techniques and support for high performance memory systems including external second level cache controllers.

As general purpose microprocessors have continued to become more powerful, they have been asked to perform increasingly complex tasks. In fact, the trend of doubling system performance every 1.5 to 2 years has not met the requirements of the networking and telecommunications infrastructure industry due to several emerging applications and trends. Example applications include the explosive growth of the Internet, the emergence of new digital communications technologies, including digital cellular phones employing CDMA, TDMA and PCS technologies, IP-based telephony, fax and multimedia and wireless messaging. A general trend in the industry is using programmable processors to implement adaptive filters, modulators/demodulators, and other functions once only possible in hardware. These trends and applications have created tremendous opportunities for high-performance, high bandwidth processors. These demanding new applications, along with the continually increasing needs of the computing market, necessitated a new approach in how to maximize performance in order to provide our customers with the order of magnitude increase in key application performance they demand.

To meet these needs, a new class of microprocessor product is called for. One which offers in a single chip solution the high-

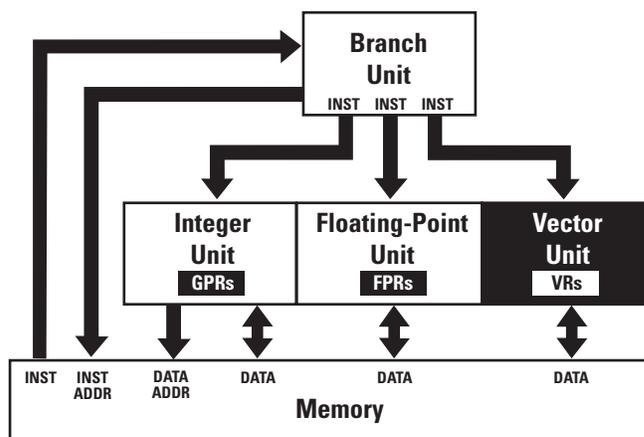


Figure 1. High-level structural overview for PowerPC with AltiVec technology

est level of processing performance while expanding the processor's capabilities to concurrently address high-bandwidth data processing and the algorithmic intensive computations which today are typically handled off-chip by other devices, such as dedicated hardware, DSP farms or custom ASICs. Motorola is introducing a new technology that provides for this convergence in capabilities — AltiVec technology.

AltiVec technology is Motorola's high-performance vector parallel processing expansion to the PowerPC™ RISC processor architecture. Motorola microprocessors offering AltiVec technology will represent a new class of product. In addition to providing 100% compatibility with the industry-standard PowerPC Architecture™, AltiVec technology will also provide product designers and customers with a new "one part—one code base" approach to product design which simplifies design and support while simultaneously providing a tremendous jump in performance.

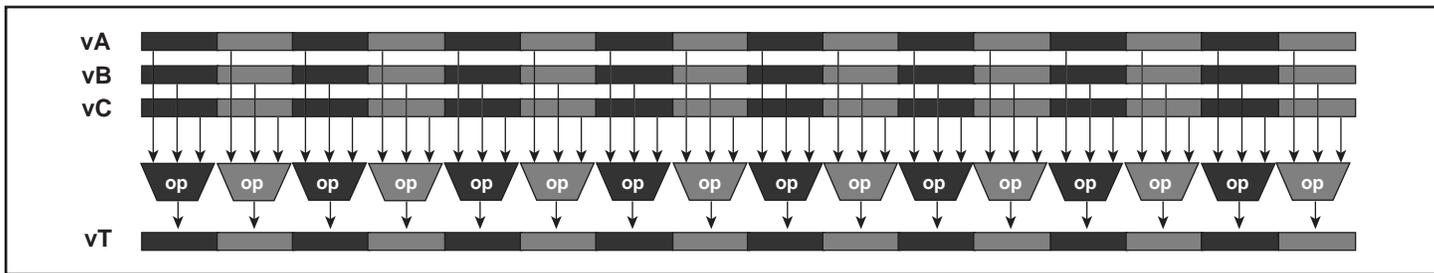


Figure 2. Generic presentation of a four operand, 16-element, intra-element operation

AltiVec Technology

Motorola's AltiVec technology expands the current PowerPC architecture through the addition of a 128-bit vector execution unit, which operates concurrently with the existing integer and floating point units. This new engine provides for highly parallel operations, allowing for the simultaneous execution of up to 16 operations in a single clock cycle.

AltiVec technology is a short vector parallel architecture. Depending on data size, vectors are 4, 8 or 16 elements long. This can be contrasted with the long vector architectures of supercomputers that were popular in the 1980s. Vector sizes for those machines ranged to hundreds of elements. The long vector approach of supercomputers, while useful for scientific calculations, is not optimal for the communications, multimedia and other performance-driven applications targeted by Motorola with AltiVec technology.

AltiVec technology operations are performed on multiple data elements by a single instruction. This is often referred to as SIMD (single instructions, multiple data) parallel processing. AltiVec technology offers support for:

- 16-way parallelism for 8-bit signed and unsigned integers and characters,
- 8-way parallelism for 16-bit signed and unsigned integers

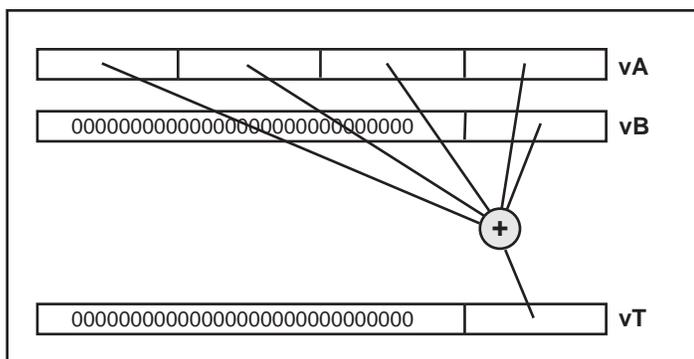


Figure 3. Sum Across — an inter-element arithmetic operation

- 4-way parallelism for 32-bit signed and unsigned integers and IEEE floating-point numbers

AltiVec technology also includes a separate register file containing 32-entries, each 128-bits wide. These 128-bit wide registers hold the data sources for the AltiVec technology execution units. The registers are loaded and unloaded through vector store and vector load instructions that transfer the contents of a single 128-bit register to and from memory.

AltiVec technology can be most accurately thought of as a set of registers and execution units added to the PowerPC architecture in an analogous manner to the addition of floating point units. Floating point units were added to most mainstream microprocessor architectures several years ago to provide better support for high-precision scientific calculations. AltiVec technology is being added to the PowerPC architecture to dramatically accelerate the next level of performance-driven, high-bandwidth communications and computing applications.

Each AltiVec instruction specifies up to three source operands and a single destination operand. All operands are vector registers, with the exception of the load and store instructions and a few instruction types that provide operands from immediate fields within the instruction. 162 new unique instructions are defined for the AltiVec technology. These instructions fall into the following major classes.

1. Intra-Element Arithmetic Operations

Intra-element arithmetic operations perform independent parallel computations on the elements contained in the source vector registers and place the results in the corresponding fields of the destination vector register. Both signed and unsigned integers and floating-point data types are supported by the intra-element operations. The operations support both saturation and modulo arithmetic. A variety of powerful intra-element operations are defined in the AltiVec technology: addition, subtraction, multiply, and multiply-

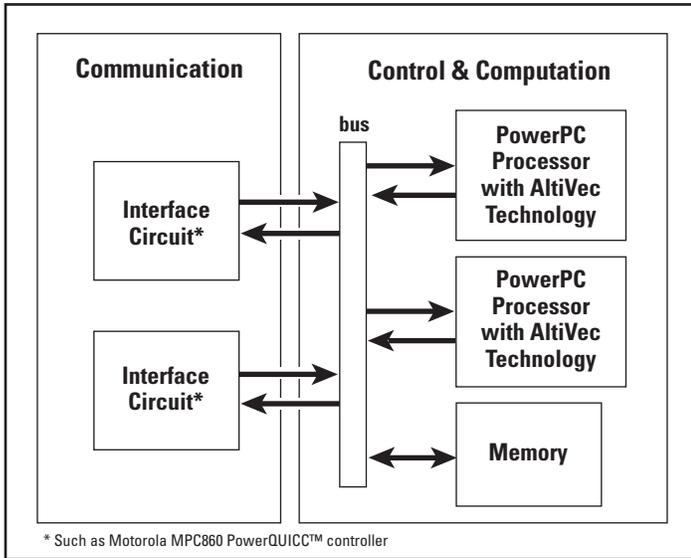


Figure 6. System using multiple PowerPC processors with AltiVec technology, sharing a common bus bridged to shared memory

embedded systems developers. To more easily express the parallelism presented by AltiVec technology, Motorola has developed a standardized set of C/C++ language extensions. These language extensions allow a software developer to use their preferred C/C++ development environment and language syntax while explicitly taking advantage of the parallel functional units other facilities offered by the AltiVec technology. Motorola is working with leading tools providers to develop simulators, assemblers, linkers and compilers to assure full support for the AltiVec technology.

While the initial PowerPC microprocessor utilizing AltiVec technology will target very high-performance applications in networking and computing, subsequent Motorola processors with AltiVec technology could address markets and applications in which performance must be balanced with power, price and peripheral integration.

A New Design Model

The introduction of processors containing AltiVec technology creates a new model of system design for high-performance embedded systems. Historically, many high-perfor-

mance embedded applications have contained a combination of a single RISC processor performing the system control function and one or more DSPs or ASICs performing specialized computations.

The single RISC processor plus multiple DSP system has a number of disadvantages, including two different architectures, code bases, hardware types, and debug environments. Additionally, because DSPs have not been on the same performance growth curve as general purpose processors - for example, they often require users to switch to newer non-compatible architectures from generation to generation, even minor upgrades in a customer's product performance often required major hardware redesigns; often including changing DSP or controller architectures with the attendant cost and time to market impact.

AltiVec technology-based systems can provide more capable single architecture systems, often at lower cost, power budget, and physical area than controller plus DSP solutions. The use of a single high-performance device for controller and signal processing functions results in quicker time to market and lower overall engineering cost. A single architecture solution provides a simpler development task to both the hardware and software engineer.

Summary

With the introduction of AltiVec technology, Motorola is demonstrating its commitment to the PowerPC architecture and to meeting the requirements of next generation networking, communications and computing applications. AltiVec technology will expand the PowerPC microprocessor capability by providing leading edge general purpose processing performance while concurrently addressing high-bandwidth data handling processing and algorithmic intensive computations in a single chip solution. This new class of processor will provide an aggressive performance growth path for embedded and computing systems designers, while lowering development barriers inherent in multiple architecture designs, thereby reducing the time to market and total system development expense.

©1998 Motorola, Inc. All rights reserved. Printed in the U.S.A. Motorola and the M are registered trademarks and AltiVec and the AltiVec logo are trademarks of Motorola, Inc. PowerPC, the PowerPC logo and PowerPC Architecture are trademarks of International Business Machines Corporation and used by Motorola, Inc. under license therefrom. This document contains information on a new product under development. Specifications and information herein are subject to change without notice.